




MAINTENANCE**FREE**



1130

134mm x 24mm
5 1/4" x 15/16"








MAIN FEATURES

- Available in 10 different finishes
- Suitable for doors of 30mm min. thickness up to 1000mm wide
- Easy 3D adjustable
- Load capacity 132 lbs. (60 kg.)
- Fluid 180° opening
- Easy installation with symmetrical mortising for door and frame
- Manufactured in Zinc to resist oxidation
- Tested for minimum 200,000 opening /closing cycles.
- Manufactured in Italy

Color	Item	Description
	C1130NK	3D Invisible Hinge 134 x 24 Nickel Plated
	C1130SNI	3D Invisible Hinge 134 x 24 Satin Nickel Plated
	C1130BLK	3D Invisible Hinge 134 x 24 Matte Black

*Other finishes available upon request

MODEL	TECHNOLOGY	MATERIAL	DIMENSION L - W - D mm / Inches	MINIMUM DOOR THICKNESS mm / Inches	RANGE OF REVERSIBILITY mm / Inches	LOAD CAPACITY kg / lbs		FIREPROOF min.
						2 hinge	3 hinge	
1130	Concealed Hinge	Zinc	134 x 24 x 21mm 5 1/4" x 15/16" x 13/16"	30mm 1 3/16"	30 - 33mm 1 3/16" - 1 5/16"	40 kg 88 lbs	60 kg 132 lbs	EI-30*

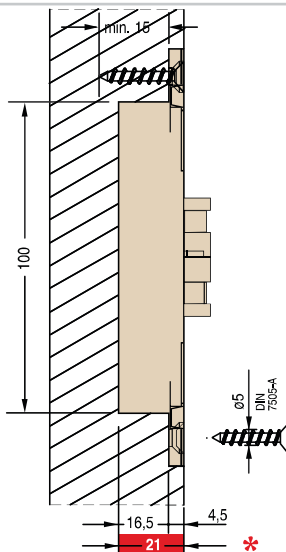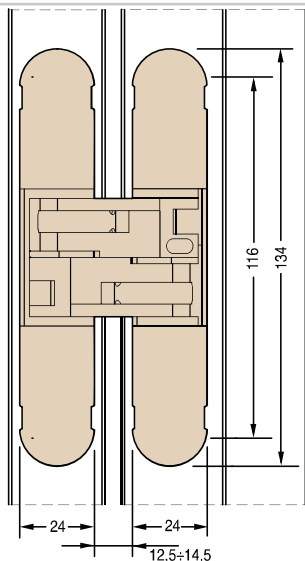

Note: Manufacturing tolerance are based on metric dimensions.
Fractions are for reference only.

made in italy